


- Features:
- Sturdy plated steel brackets, thru-bolts, centering washers, and insulating washers
 - Brackets provide elongated mounting holes for ease of mounting


Mounting Brackets Mechanical Specifications

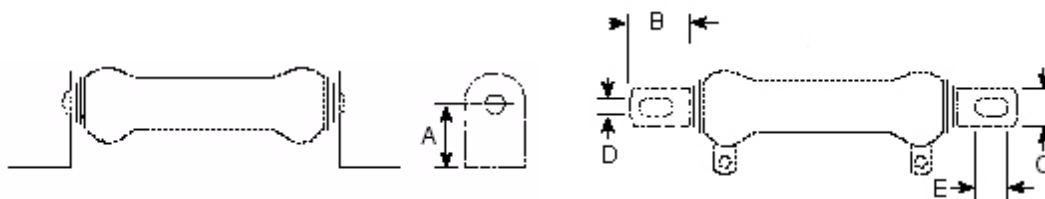


Resistor Power Rating	A	B	C	D	E	Units
25W	1.000	0.750	0.500	0.219	0.438	inches
	25.40	19.05	12.70	5.56	11.13	mm
50W	1.000	0.750	0.500	0.219	0.438	inches
	25.40	19.05	12.70	5.56	11.13	mm
100W	1.00	0.75	0.50	0.219	0.438	inches
	25.40	19.05	12.70	5.56	11.13	mm
150W	1.500	0.875	1.250	0.281	0.563	inches
	38.10	22.23	31.75	7.14	14.30	mm
175W	1.500	0.875	1.250	0.281	0.563	inches
	38.10	22.23	31.75	7.14	14.30	mm
200W	1.500	0.875	1.250	0.281	0.563	inches
	38.10	22.23	31.75	7.14	14.30	mm
225W	1.500	0.875	1.250	0.281	0.563	inches
	38.10	22.23	31.75	7.14	14.30	mm
250W	1.500	0.875	1.250	0.281	0.563	inches
	38.10	22.23	31.75	7.14	14.30	mm
300W	1.500	0.875	1.250	0.281	0.563	inches
	38.10	22.23	31.75	7.14	14.30	mm
400W	1.500	0.875	1.250	0.281	0.563	inches
	38.10	22.23	31.75	7.14	14.30	mm
500W	3.000	1.500	2.500	0.406	-	inches
	76.20	38.10	63.50	10.30	-	mm
700W	1.500	0.875	1.250	0.281	0.563	inches
	38.10	22.23	31.75	7.14	14.30	mm
1000W	3.000	1.500	2.500	0.406	-	inches
	76.20	38.10	63.50	10.30	-	mm
1300W	3.000	1.500	2.500	0.406	-	inches
	76.20	38.10	63.50	10.30	-	mm

Bolt and Washers Mechanical Specifications

Metal Centering Washer

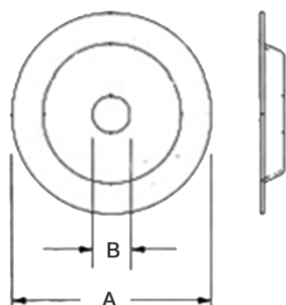

Mica Insulating Washer

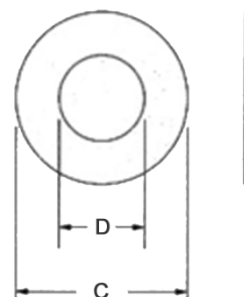

Resistor Power Rating	OD	Core Length	Bolt Length	Bolt No.	A	B	C	D	Units
25W	0.563 14.30	2.008 51.00	2.500 63.50	10	0.560 14.22	0.190 4.83	0.750 19.05	0.313 7.95	inches mm
50W	0.563 14.30	4.016 102.00	4.750 120.65	10	0.560 14.22	0.190 4.83	0.750 19.05	0.313 7.95	inches mm
100W	0.752 19.10	6.496 165.00	7.000 177.80	10	0.750 19.05	0.190 4.83	1.000 25.40	0.500 12.70	inches mm
150W	1.102 28.00	8.110 206.00	7.750 196.85	0.25	1.125 28.575	0.250 6.35	1.250 31.75	0.625 15.875	inches mm
175W	1.126 28.60	8.504 216.00	9.125 231.78	0.25	1.125 28.575	0.250 6.35	1.500 38.10	0.750 19.05	inches mm
200W	1.378 35.00	8.740 222.00	9.250 234.95	0.25	1.400 35.56	0.250 6.35	1.500 38.10	0.750 19.05	inches mm
225W	1.126 28.60	10.512 267.00	11.250 285.75	0.25	1.125 28.575	0.250 6.35	1.500 38.10	0.750 19.05	inches mm
250W	1.575 40.00	8.740 222.00	9.250 234.95	0.5	1.570 39.878	0.500 12.70	2.000 50.80	1.000 25.40	inches mm
300W	1.575 40.00	10.709 272.00	11.125 282.58	0.5	1.570 39.878	0.500 12.70	2.000 50.80	1.000 25.40	inches mm
400W	1.575 40.00	13.465 342.00	14.000 355.60	0.5	1.570 39.878	0.500 12.70	2.000 50.80	1.000 25.40	inches mm
500W	2.500 63.50	12.008 305.00	12.500 317.50	0.5	2.500 63.50	0.500 12.70	3.000 76.20	1.500 38.10	inches mm
700W	1.969 50.00	18.189 462.00	18.750 476.25	0.5	1.970 50.04	0.500 12.70	2.250 57.15	1.250 31.75	inches mm
1000W	2.500 63.50	20.000 508.00	20.500 520.70	0.5	2.500 63.50	0.500 12.70	3.000 76.20	1.500 38.10	inches mm
1300W	2.559 65.00	26.260 667.00	27.000 685.80	0.5	2.560 65.02	0.500 12.70	3.000 76.20	1.500 38.10	inches mm